



## LONG-RANGE GROUND AND COASTAL SURVEILLANCE RADAR

# FLIR Ranger® R20SS

The FLIR Ranger® R20SS is a ground and coastal FMCW radar specifically designed to detect and track personnel, vehicles, and watercraft at ranges up to 60km. Among the fastest scan rates and lowest minimum detection velocity (MDV) radars available, the Ranger R20SS can simultaneously track up to 512 targets moving in any direction at virtually any speed. Low weight, ruggedness, and easy implementation make it an ideal candidate for vehicle applications.

Built on a digital beam-forming architecture, the R20SS provides continuous 90° coverage that includes “track while scan” capabilities for concurrent targets at different bearings. Adaptive, automatic tracking enables easy integration with slew-to-cue cameras, and when deployed with an optional pan/tilt device or in a multi-radar configuration, the R20SS provides 360° coverage. The R20SS includes standard built-in GPS and digital magnetic compass (DMC) for automatic true north alignment and self-positioning on a background map, which is optimal for rapid deployment.

### FEATURES

#### APPLICATION VERSATILITY

Use the Ranger R20SS for mobile or fixed border security, force protection, and coastal surveillance.

#### ACCURATE TARGET LOCATION

Advanced tracking algorithms enable fast detection and track initiation, resulting in high accuracy and extremely low false alarm rate.

#### X-BAND SYSTEM RELIABILITY

All-weather X-band operation means minimal effects from adverse precipitation and extreme climate conditions.

#### LOW SWAP APPLICATIONS

Low SWaP minimizes infrastructure costs, and its low weight and easy implementation makes R20SS ideal for vehicle or man-portable deployment.

#### MAN-PORTABLE & EASY TO INTEGRATE

R20SS fits in the backpack of a dismounted soldier and requires only one cable and four bolts for integration.

### APPLICATIONS

BORDER SECURITY

COASTAL SURVEILLANCE

FORCE PROTECTION

INDUSTRIAL FACILITY


CRITICAL INFRASTRUCTURE SECURITY

AIR & SEA PORTS

VEHICLE & MAN-PORTABLE CAPABILITIES

## SPECIFICATIONS

R20SS		
Operating Frequency	X Band	
Minimum Detection Velocity	> 0.1 m/s min, Vehicles, personnel, rubber rafts, boats	
Target Velocity	0.1 to 44 m/s	
Number of tracks	Up to 512 simultaneous	
Range Accuracy	± 3 m (1 sigma)	
Azimuth Accuracy	± 0.2 deg (1 sigma)	
Scan Rate	2 Hz (90 deg sector)	
Coverage	90° AZ, 5° EL in sector mode, 360° AZ, ± 30° EL in scan mode (with optional pan/tilt device)	
Elevation Control	Yes with optional Pan/Tilt	
Input Power	21-42 VDC	
Communications	Ethernet, wireless, fiber	
XML	Yes (ICD-0100 compatible)	
Mask Zone(s)	Unlimited polygons	
Dimensions	Radar only: 14.7h x 29.6w x 6.0d (inches), 37h x 75w x 14d (cm) Radar with pan/tilt: 29.4h x 29.6w x 6.6d (inches), 75h x 75w x 17d (cm)	
	Standard	Low Power
Weight	40 lbs (18.2 kg) – radar 26.4 lbs (12 kg) – pan/tilt	40 lbs (18.2 kg) – radar 20.7 lbs (9.4 kg) – pan/tilt
Power Consumption (nominal)	245 Watts (radar) ≤ 30 Watts (pan/tilt)	170 Watts (radar) ≤ 30 Watts (pan/tilt)
Operating Range	20 – 30,000 m 20 – 60,000 m (ext range)*	20 – 30,000 m
Detection Range:		
Personnel Walking (1 m² RCS)	Up to 12,000 m	Up to 10,000 m
Rubber Raft (1 m² RCS, ss 3)	Up to 12,000 m	Up to 10,000 m
Patrol Vessel (10 m² RCS, ss 4)	Up to 20,000 m	Up to 16,000 m
Vehicles, Vessels (≥ 30 m² RCS)	Up to 28,000 m	Up to 25,000 m
Vehicles, Vessels (≥ 10,000 m² RCS)	Up to 55,000 m (ext range)	Up to 28,000 m
False Alarm Rate	Very Low	
Temperature	-40° to +60°C (operating), -40° to +70°C (storage)	
Humidity	Up to 100%,	
Weather Sealing	IP 67 Rating – radar. IP 66 – pan/tilt	
Mil Spec	Complies with MIL-STD-810G and MIL-STD-461F	
MTBF	> 28,000 hrs – radar. > 50,000 hrs – pan/tilt	

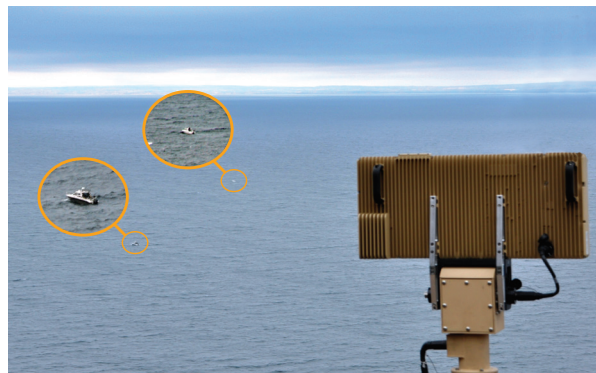

Note: Detection Range is subject to radar height AGL or ASL

### AMERICAS

FLIR Systems, Inc.  
Corporate Headquarters  
27700 SW Parkway Ave  
Wilsonville, OR 97070  
Office: +1 877.773.3547

FLIR Systems, Inc.  
DC Headquarters  
1201 S. Joyce Street  
Suite C006  
Arlington, VA 22202  
Office: +1 703.682.3400

### EUROPE

FLIR Systems  
2 Kings Hill Avenue - Kings Hill  
West Malling, Kent ME19 4AQ  
United Kingdom  
Office: +44 (0)1732 220 011  
Fax: +44 (0)1732 843 707

FLIR Systems AB  
Antennvägen 6,  
PO Box 737  
SE-187 66 Täby  
Sweden  
Office: +46 (0)8 753 25 00

### MIDDLE EAST

FLIR Systems B.V. - Abu Dhabi  
Wadi Al Fey St.  
Building 60, Office # 302  
New Ministries Exit / Khalifa Park Area  
Abu Dhabi, U.A.E.  
Office: +971 2 666 1561  
e-Fax: +1 503 914 1591

FLIR Systems Saudi Arabia  
Office 127, First Floor  
Akaria Plaza Building, Olaya Street  
Riyadh, 11481, Saudi Arabia  
Office: +966 11 464 5323  
Fax: +966 11 464 0438

### ASIA

FLIR Systems Japan K.K.  
Meguro Tokyu Bldg. 5F,  
2-13-17  
Kami-Osaki, Shinagawa-ku.  
Tokyo, 141-0021, Japan  
Office: +81-3-6721-6648

For More Information contact  
surveillance\_sales@flir.com

www.flir.com  
NASDAQ: FLIR

Equipment described herein pertains to a Canadian origin product that is controlled as dual-use by the Canadian government. When in the United States or possessed by a US person, it may be subject to US Jurisdictions, which may require authorization to re-transfer to a foreign person. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2019 FLIR Systems, Inc. All rights reserved. Revised on 07/12/19

18-1966-SUR-R20SS Specsheet LTR



The World's Sixth Sense®